

Data Sheet Model No.: GP908G

## **NO MERCURY ADDED**

Description : Mercury Free Extra Heavy Duty 6V Lantern

Battery

Chemical System : Zinc Chloride Nominal Voltage : 6.0 Volts

Nominal Dimensions: 66 mm x 66 mm x 111 mm

Terminals : Coil Spring

Jacket : Black Plastic Jacket, Ultrasonic Welded Applications : Lanterns, road lamps and other heavy duty

lighting devices


Shelf Life : 12 months Average Weight : 600g

Date Code : Unless otherwise specified, every battery

will carry an expiry date code for 12 months. (e.g. a battery manufactured on January 1999 will carry an expiry code of 01-00.) 01 stands for January, 00 stands for 2000

## **Estimated Service:**

Discharge	Discharge	End Point	Service
Resistance	Condition	Voltage	Life
6.8 Ohms	30 Mins/ Hr 8 Hrs/ Day	3.6V	380 Mins
8.2 Ohms	30 Mins/ Day	3.6V	11 Hrs
120 Ohms	12 Hrs/ Day	3.6V	230 Hrs

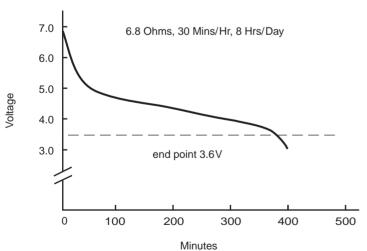

At 20°C within 30 days of manufacture

## **Cross References:**

GP	JIS	IEC	Eveready	Duracell/Mallory
908G	4F	4R25	509	M908

